

## Microphones 4

### Dynamic microphone

# E 602


#### Description

The e 602 is a cardioid microphone especially suitable for use with bass drums, bass guitar cabs, tubas and other low frequency instruments. Sound inlet basket: refined steel.

**Cat. No. 04521**

#### Features

- Rugged metal body
- Lightweight, high-performance voice coil construction with large diaphragm design
- Fast transient response
- Low frequency extension
- Ideal for direct use on the most problematic bass signal sources
- Frequency-independent directivity provides isolation from other on-stage signals
- Hum compensating coil
- Integral stand mount

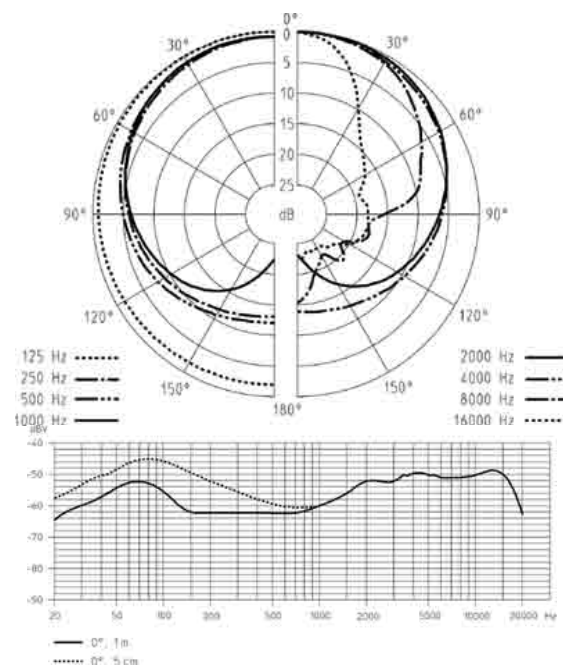

#### Technical data

|   |                 |
|---|-----------------|
| Frequency Response                        | 20.....16000 Hz |
| Sensitivity in free field, no load (1kHz) | 1,0 mV/Pa       |
| Min. terminating impedance                | 1000 Ohm        |
| Dimensions                                | d 60 x 153 mm   |
| Weight w/o cable                          | 550 g           |

#### Profile

Cardioid instrument microphone, hum compensating coil, frequency response 20 Hz - 16 kHz, sensitivity (free field, no load) 1.0 mV/Pa at 1 kHz, nominal impedance 250 Ohm, min. terminating impedance 1 kOhm, dimensions Ø 60 x 153 mm, weight 550 g.

#### Delivery includes

- 1 e 602
- 1 pouch